




## ROLLER SHADE MANUAL CONTROLS

### NeoShade™ System

- Does not require a chain
- Can easily be operated by pulling the shade from the bottom bar or blind pull to the desired height.
- Can easily be retracted by a slight pull of the bottom bar or blind pull.
- Fits jamb depths of 2.5" for inside flush mount
- Provides a minimal side light gap of 6.5mm (¼")
- Shipped as a completely tested unit, with no assembly required.
- Mounting brackets and shade holder make for a simple installation.
- Smart lock and snap release allow for easy dismounting when required.
- Maximum opening width is 96" depending on fabric weight
- Includes white thermoplastic mounting brackets for shades under 34"
- Includes white mounting bracket covers for shades 35" to 96"
- Optional valance choices include Decora 8, Wood, and Fabric valances.
- The minimum width requirement is 22".

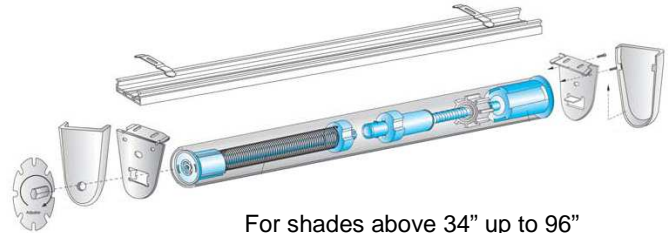

For shades above 34" up to 96"



For shades above 22" to 34"